


Technical Data Sheet
Quick-Lock
Sleeves

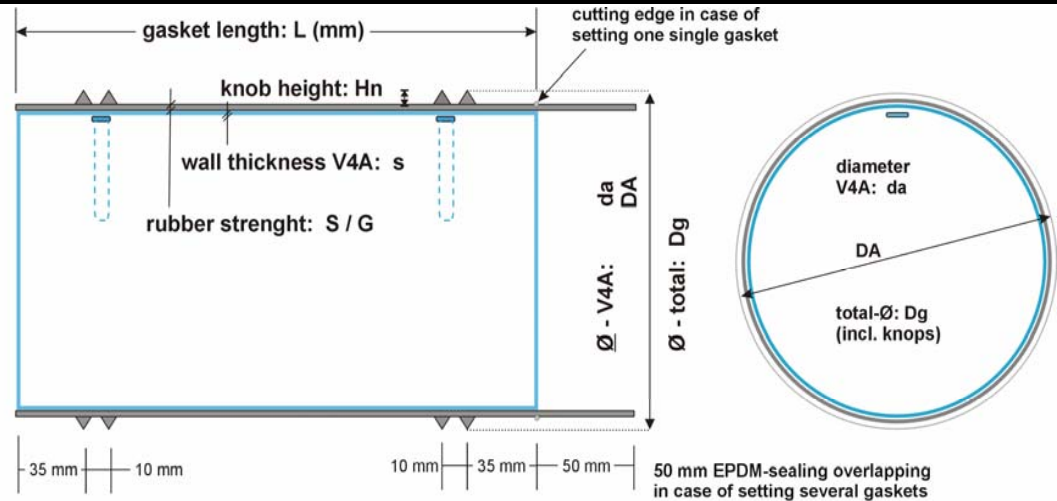

Pipe DN	length of the gasket	V4A-gasket			sealing rubber			total diameter roled	total weight
		wall thickness	V4A-pipe roled since da max. stretch diameter DA		rubber diameter	rubber thickness	height of the sealing knobs		
mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
spezification:	L	s	da	DA	Dg inside	S / G	Hn	Dg	
150	400	1	120	149	117	2	4,0	132	2,25 kg
188	400	1	151	188	157	2	4,0	163	2,7
200	400	1	160	199	157	2	4,0	172	2,82 kg
225	400	1	184	227	157	2	4,0	196	3,95
238	400	1,2	191	236	197	2	5	205	4,18
250	400	1,2	203	252	197	2	5	217	4,43
300	400	1,2	245	305	242	2	7	263	5,35
315	400	1,2	252	315	242	2	7	270	6,64
350	400	1,5	290	355	288	2	7	308	7,34
380	400	1,5	300	377	288	2	7	318	7,74
400	400	1,5	322	405	315	2	8	342	8,91
450	500	2	362	455	337	2	8	382	15,94
500	500	2	424	505	410	2	8	444	16,76
600	500	2	515 (**490)	607 (**610)	511	2	9	537 (**512)	20,23
700	485	2	570	713	511	3	9	592	24,03
800	485	2	695	815	680	3	9	719	27,0

** special V4A-gasket for manhole in the Netherlands